Hangzhou Shuyi Electric Appliance Co., Ltd.

# Industrial Dehumidifier

OEM&ODM | Powerful dehumidification ability | Good security

DJ-2481E type | Specification sheet

## SPECIFICACIONES

| | |
|---|---|
| **Model number** | DJ-2481E |
| **Dehumidify capacity** | 240L/day (T:30 ℃ /80%RH) |
| **Supply Voltage** | 380V/50Hz |
| **Power Consumption** | 3.5KW |
| **Current draw** | 5.5Amps |
| **Circulating air flow** | 2800m3/h |
| **Humidity control range** | 45%-95% |
| **Working Temperature Range** | 5~38°C |
| **Compressor type** | Rotary |
| **Sound** | 60dB(decibel) |
| **Drainage way** | Hose connection |
| **Warranty** | 1 Year |
| **Standard packaging** | Wooden case |
| **N.Weight/G.Weight** | 106kgs/137kgs |
| **Dimension(L*W*H)** | 778x469x1697mm |
| **Package size(L*W*H)** | 845x525x1880mm |

## FEATURES

- Ambient temperature humidity display timely
- World famous LG compressor with safety protection
- Humidity control range 45%-95%RH,accuracy to ±3%
- 3 minutes delay start protection.
- Eco-friendly refrigerant R410a
- Timed on/off setting with memory function
- Continously drainage by external soft tube
- Sensor fault indication function.
- Support RS485 interface, multiple online control
- Automatically defrosting.

## TOJJE SERVICE

1.OEM/ODM orders welcomed, full sets drawings provide within 7 days
2.Precision solution and offer provide within 2 days, fastest response by kinds of communication way
3.One-to-one unique on-call customer service with 10 minutes reply rate
4.1 year warranty for whole unit, allow extend the warranty 2 year after discussion.
5.Supply spare parts for free if machine damaged because of quality defects.
6.Provide Ce certificates,quality assurance agreements,technical advice, installation guidance.

## WORKING PRINCIPLE

The design purpose of the TOJJE DJ-2481E dehumidifier is to dehumidify the air entering the unit by entering the evaporator coil, in order to lower the air temperature below the dew point. Humidity is removed from the air and discharged from the outside of the device to public floors or waste discharge outlets. Then, the air overheats in the serpentine tube of the condenser and leaves the device. Dehumidification occurs before reaching the set value, and then closes until the control determines the necessary operation.

## IMPLEMENT

The TOJJE DJ-2481E dehumidifier is the perfect solution for accurately adjusting the humidity required for indoor environments.

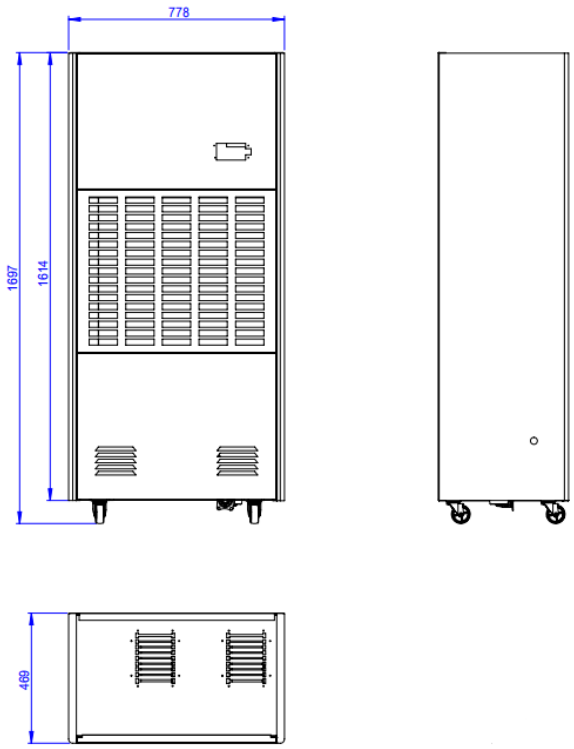


https://www.tojje.com https://hzshuyi.en.alibaba.com